

# The standard reference on the market

## MICHELIN AGRIBIB



VERSATILITY

TRACTION



Service life: up to **2 years\***  
more use

Operating cost



### Sizes

11.2 R24 TL 114A8/111B  
 12.4 R24 TL 119A8/116B  
 13.6 R24 TL 121A8/118B  
 14.9 R24 TL 126A8/123B  
 16.9 R24 TL 134A8/131B  
 12.4 R28 TL 121A8/118B  
 13.6 R28 TL 123A8/120B  
 14.9 R28 TL 128A8/125B  
 16.9 R28 TL 136A8/133B  
 380/85 R30 TL 135A8/135B


16.9 R30 TL 137A8/134B  
 420/90 R30 TL 147A8/147B  
 18.4 R30 TL 142A8/139B  
 320/85 R34 TL 133A8/130B  
 380/85 R34 TL 137A8/137B  
 420/85 R34 TL 142A8/142B  
 18.4 R34 TL 144A8/141B  
 12.4 R38 TL 125A8/122B  
 13.6 R38 TL 128A8/125B  
 380/80 R38 TL 142A8/142B

420/85 R38 TL 144A8/144B  
 18.4 R38 TL 146A8/143B  
 520/85 R38 TL 155A8/155B  
 480/80 R42 TL 156A8/156B  
 520/85 R42 TL 157A8/157B  
 420/80 R46 TL 151A8/148B  
 480/80 R46 TL 158A8/158B  
 520/85 R46 TL 158A8/155B  
 480/80 R50 TL 159A8/159B

\* Compared with the average calculated on 13 popular sizes on the standard market  
 Source: MICHELIN test and research center (Ladoux)




## ■ Unparalleled service life

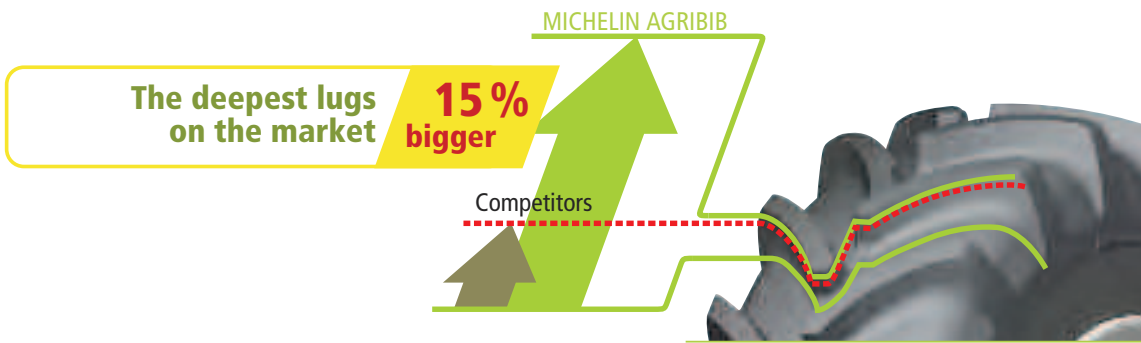

Source: MICHELIN test and research center (Ladoux)  
 Calculation: Average calculated on 13 popular sizes on the standard market

## ■ The highest levels of performance throughout its life

Tread pattern retained as wear progresses

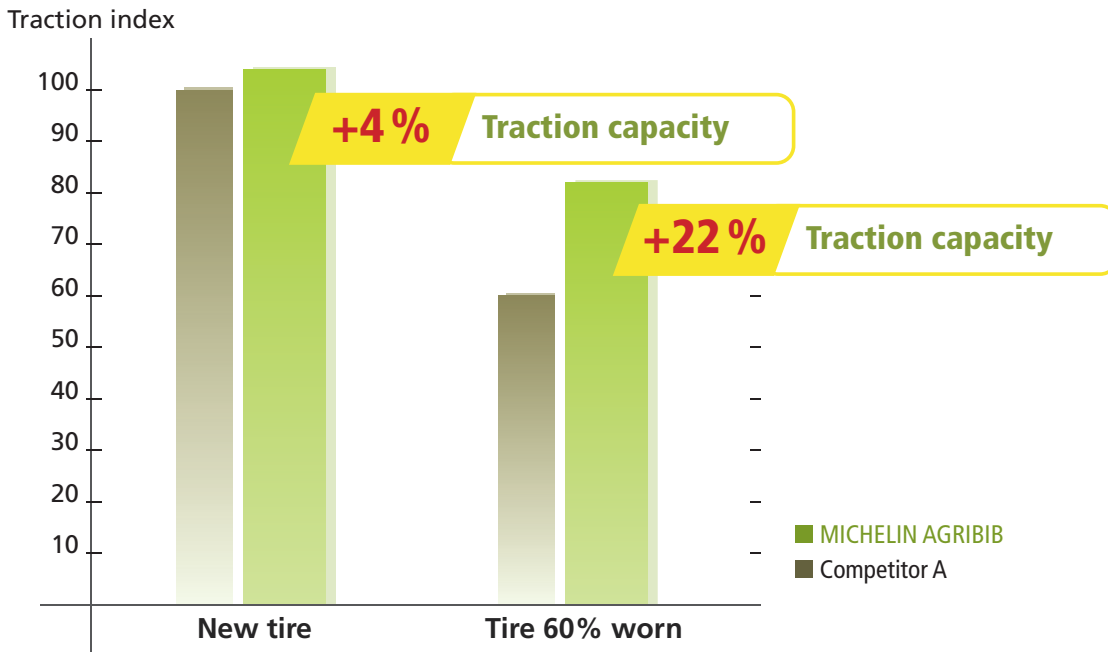

Source: Analytical test performed on the test tracks at the MICHELIN test and research center (Ladoux)  
 Test conditions: Clay / chalky soil – Tire size: 18.4 R38

# MICHELIN Agribib®

## Technical Data

<b>11.2R24 114A8/111B TL AGRIBIB®</b>					<b>MSPN : 70146</b>					<b>CAI : 123864</b>				
Load per tire					See notes on page 14 for guidance on correct application of these load / pressure tables.									
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure	Tire Technical Data				Rims (preferred in bold) <b>W10</b> W9					
					Unloaded Dimensions		Loaded Dimensions							
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference						
					11.6 in 294 mm	43.0 in 1,092 mm	19.6 in 498 mm	129.6 in 3,292 mm						
		1,570 lbs 710 kgs	1,980 lbs 900 kgs	7 psi 0.5 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Rolling Circumference Index</b> 36 <b>Number of Lugs</b> 19 x 2         </div>				Tube MSPN 82631					
1,590 lbs 720 kgs	1,700 lbs 770 kgs	1,810 lbs 820 kgs	2,290 lbs 1,040 kgs	9 psi 0.6 bar						Tube CAI 170037				
1,750 lbs 795 kgs	1,870 lbs 850 kgs	2,010 lbs 910 kgs	2,540 lbs 1,150 kgs	12 psi 0.8 bar	Minimum Dual/Triple Spacing									
1,920 lbs 870 kgs	2,060 lbs 935 kgs	2,190 lbs 995 kgs	2,790 lbs 1,265 kgs	15 psi 1.0 bar		15.4 in 392 mm								
2,070 lbs 940 kgs	2,240 lbs 1,015 kgs	2,390 lbs 1,085 kgs	3,030 lbs 1,375 kgs	17 psi 1.2 bar	Gross Flat Plate									
2,240 lbs 1,015 kgs	2,430 lbs 1,100 kgs	2,580 lbs 1,170 kgs	3,280 lbs 1,490 kgs	20 psi 1.4 bar		100% Tire Volume								
2,400 lbs 1,090 kgs	2,600 lbs 1,180 kgs	2,780 lbs 1,260 kgs	3,530 lbs 1,600 kgs	23 psi 1.6 bar	Tread Depth									
			3,660 lbs 1,660 kgs	25 psi 1.7 bar		131 sq in 848 sq cm								
			3,780 lbs 1,715 kgs	26 psi 1.8 bar	32.5 gals 123 liters									
			3,900 lbs 1,770 kgs	28 psi 1.9 bar		47/32nd 37 mm								

<b>12.4 R24 119A8/116B TL AGRIBIB®</b>					<b>MSPN : 78449</b>					<b>CAI : 123788</b>				
Load per tire					See notes on page 14 for guidance on correct application of these load / pressure tables.									
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure	Tire Technical Data				Rims (preferred in bold) <b>W11</b> W10					
					Unloaded Dimensions		Loaded Dimensions							
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference						
					12.8 in 324 mm	45.2 in 1,149 mm	20.5 in 520 mm	134.6 in 3,420 mm						
		1,790 lbs 810 kgs	2,290 lbs 1,040 kgs	7 psi 0.5 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Rolling Circumference Index</b> 37 <b>Number of Lugs</b> 19 x 2         </div>				Tube MSPN 82631					
1,830 lbs 830 kgs	1,940 lbs 880 kgs	2,090 lbs 950 kgs	2,650 lbs 1,200 kgs	9 psi 0.6 bar						Tube CAI 170037				
2,020 lbs 915 kgs	2,150 lbs 975 kgs	2,310 lbs 1,050 kgs	2,930 lbs 1,330 kgs	12 psi 0.8 bar	Minimum Dual/Triple Spacing									
2,200 lbs 1,000 kgs	2,360 lbs 1,070 kgs	2,550 lbs 1,155 kgs	3,220 lbs 1,460 kgs	15 psi 1.0 bar		16.9 in 429 mm								
2,380 lbs 1,080 kgs	2,580 lbs 1,170 kgs	2,770 lbs 1,255 kgs	3,510 lbs 1,590 kgs	17 psi 1.2 bar	Gross Flat Plate									
2,570 lbs 1,165 kgs	2,790 lbs 1,265 kgs	3,000 lbs 1,360 kgs	3,780 lbs 1,715 kgs	20 psi 1.4 bar		100% Tire Volume								
2,760 lbs 1,250 kgs	3,000 lbs 1,360 kgs	3,220 lbs 1,460 kgs	4,070 lbs 1,845 kgs	23 psi 1.6 bar	Tread Depth									
			4,210 lbs 1,910 kgs	25 psi 1.7 bar		155 sq in 998 sq cm								
			4,350 lbs 1,975 kgs	26 psi 1.8 bar	40.7 gals 154 liters									
			4,500 lbs 2,040 kgs	28 psi 1.9 bar		52/32nd 41 mm								

### 13.6 R24 121A8/118B TL AGRIBIB® MSPN : 97644 CAI : 123868

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>W12</b> W11	
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure							
				1,220 lbs 555 kgs	6 psi 0.4 bar	Unloaded Dimensions	Loaded Dimensions	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN 89251 Tube CAI 170039 Minimum Dual/Triple Spacing 18.3 in 465 mm
		1,920 lbs 870 kgs	2,450 lbs 1,110 kgs	1,520 lbs 690 kgs	7 psi 0.5 bar							
1,920 lbs 870 kgs	2,070 lbs 940 kgs	2,230 lbs 1,010 kgs	2,820 lbs 1,280 kgs	1,820 lbs 825 kgs	9 psi 0.6 bar	Rolling Circumference Index 38 Number of Lugs 19 x 2						
2,120 lbs 960 kgs	2,290 lbs 1,040 kgs	2,470 lbs 1,120 kgs	3,130 lbs 1,420 kgs	2,020 lbs 915 kgs	12 psi 0.8 bar							
2,310 lbs 1,050 kgs	2,520 lbs 1,145 kgs	2,700 lbs 1,225 kgs	3,430 lbs 1,555 kgs	2,220 lbs 1,005 kgs	15 psi 1.0 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	Minimum Dual/Triple Spacing			
2,510 lbs 1,140 kgs	2,740 lbs 1,245 kgs	2,940 lbs 1,335 kgs	3,740 lbs 1,695 kgs	2,410 lbs 1,095 kgs	17 psi 1.2 bar							
2,710 lbs 1,230 kgs	2,980 lbs 1,350 kgs	3,170 lbs 1,440 kgs	4,050 lbs 1,835 kgs	2,610 lbs 1,185 kgs	20 psi 1.4 bar	168 sq in 1,086 sq cm	53.4 gals 202 liters	54/32nd 43 mm	18.3 in 465 mm			
2,910 lbs 1,320 kgs	3,200 lbs 1,450 kgs	3,420 lbs 1,550 kgs	4,340 lbs 1,970 kgs	2,810 lbs 1,275 kgs	23 psi 1.6 bar							
			4,650 lbs 2,110 kgs		26 psi 1.8 bar							
			4,810 lbs 2,180 kgs		28 psi 1.9 bar							

### 14.9 R24 126A8/123B TL AGRIBIB® MSPN : 75971 CAI : 123848

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>W13</b> W12	
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure							
				1,460 lbs 660 kgs	6 psi 0.4 bar	Unloaded Dimensions	Loaded Dimensions	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN 96691 Tube CAI 171114 Minimum Dual/Triple Spacing 19.8 in 504 mm
		2,250 lbs 1,020 kgs	2,870 lbs 1,300 kgs	1,810 lbs 820 kgs	7 psi 0.5 bar							
2,250 lbs 1,020 kgs	2,450 lbs 1,110 kgs	2,600 lbs 1,180 kgs	3,310 lbs 1,500 kgs	2,150 lbs 975 kgs	9 psi 0.6 bar	Rolling Circumference Index 39 Number of Lugs 19 x 2						
2,480 lbs 1,125 kgs	2,710 lbs 1,230 kgs	2,890 lbs 1,310 kgs	3,660 lbs 1,660 kgs	2,380 lbs 1,080 kgs	12 psi 0.8 bar							
2,710 lbs 1,230 kgs	2,970 lbs 1,345 kgs	3,160 lbs 1,435 kgs	4,020 lbs 1,825 kgs	2,610 lbs 1,185 kgs	15 psi 1.0 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	Minimum Dual/Triple Spacing			
2,950 lbs 1,340 kgs	3,230 lbs 1,465 kgs	3,450 lbs 1,565 kgs	4,380 lbs 1,985 kgs	2,830 lbs 1,285 kgs	17 psi 1.2 bar							
3,190 lbs 1,445 kgs	3,480 lbs 1,580 kgs	3,730 lbs 1,690 kgs	4,730 lbs 2,145 kgs	3,060 lbs 1,390 kgs	20 psi 1.4 bar	200 sq in 1,291 sq cm	66.0 gals 250 liters	60/32nd 48 mm	19.8 in 504 mm			
3,420 lbs 1,550 kgs	3,750 lbs 1,700 kgs	4,010 lbs 1,820 kgs	5,090 lbs 2,310 kgs	3,300 lbs 1,495 kgs	23 psi 1.6 bar							
			5,450 lbs 2,470 kgs		26 psi 1.8 bar							
			5,620 lbs 2,550 kgs		28 psi 1.9 bar							



# MICHELIN Agribib® Technical Data

<b>16.9 R24 134A8/131B TL AGRIBIB®</b>											
<b>MSPN : 97341</b>						<b>CAI : 123854</b>					
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW15L</b> W14L, DW14L, W15L	
					Unloaded Dimensions		Loaded Dimensions		Tube MSPN 44140 Tube CAI 170042 Minimum Dual/Triple Spacing 22.3 in 566 mm		
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference			
				1,740 lbs 790 kgs	6 psi 0.4 bar						
		2,800 lbs 1,270 kgs	3,570 lbs 1,620 kgs	2,200 lbs 1,000 kgs	7 psi 0.5 bar						
2,840 lbs 1,290 kgs	3,040 lbs 1,380 kgs	3,240 lbs 1,470 kgs	4,140 lbs 1,880 kgs	2,680 lbs 1,215 kgs	9 psi 0.6 bar	18.1 in 460 mm	52.4 in 1,330 mm	23.1 in 586 mm	154.9 in 3,935 mm		
3,130 lbs 1,420 kgs	3,370 lbs 1,530 kgs	3,590 lbs 1,630 kgs	4,590 lbs 2,080 kgs	2,970 lbs 1,345 kgs	12 psi 0.8 bar	Rolling Circumference Index					
3,430 lbs 1,555 kgs	3,690 lbs 1,675 kgs	3,950 lbs 1,790 kgs	5,030 lbs 2,280 kgs	3,250 lbs 1,475 kgs	15 psi 1.0 bar						
3,710 lbs 1,685 kgs	4,020 lbs 1,825 kgs	4,300 lbs 1,950 kgs	5,470 lbs 2,480 kgs	3,540 lbs 1,605 kgs	17 psi 1.2 bar	Number of Lugs 19 x 2					
4,010 lbs 1,820 kgs	4,340 lbs 1,970 kgs	4,650 lbs 2,110 kgs	5,910 lbs 2,680 kgs	3,830 lbs 1,735 kgs	20 psi 1.4 bar						
4,300 lbs 1,950 kgs	4,670 lbs 2,120 kgs	5,000 lbs 2,270 kgs	6,350 lbs 2,880 kgs	4,110 lbs 1,865 kgs	23 psi 1.6 bar						
			6,790 lbs 3,080 kgs		26 psi 1.8 bar	Gross Flat Plate	100% Tire Volume	Tread Depth			
			7,010 lbs 3,180 kgs		28 psi 1.9 bar	244 sq in 1,575 sq cm	85.8 gals 325 liters	69/32nd 55 mm			

<b>12.4 R28 121A8/118B TL AGRIBIB®</b>										
<b>MSPN : 50465</b>					<b>CAI : 123832</b>					
Load per tire					See notes on page 14 for guidance on correct application of these load / pressure tables.					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure	Tire Technical Data				Rims (preferred in bold) <b>W11</b> W10	
					Unloaded Dimensions		Loaded Dimensions			Tube MSPN 53377 Tube CAI 170051 Minimum Dual/Triple Spacing 16.9 in 429 mm
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		
		1,920 lbs 870 kgs	2,450 lbs 1,110 kgs	7 psi 0.5 bar						
1,920 lbs 870 kgs	2,070 lbs 940 kgs	2,230 lbs 1,010 kgs	2,820 lbs 1,280 kgs	9 psi 0.6 bar	12.7 in 322 mm	49.7 in 1,262 mm	22.7 in 577 mm	148.2 in 3,764 mm		
2,120 lbs 960 kgs	2,290 lbs 1,040 kgs	2,470 lbs 1,120 kgs	3,130 lbs 1,420 kgs	12 psi 0.8 bar	Rolling Circumference Index					
2,310 lbs 1,050 kgs	2,520 lbs 1,145 kgs	2,700 lbs 1,225 kgs	3,430 lbs 1,555 kgs	15 psi 1.0 bar						
2,510 lbs 1,140 kgs	2,740 lbs 1,245 kgs	2,940 lbs 1,335 kgs	3,740 lbs 1,695 kgs	17 psi 1.2 bar	Number of Lugs 20 x 2					
2,710 lbs 1,230 kgs	2,980 lbs 1,350 kgs	3,170 lbs 1,440 kgs	4,050 lbs 1,835 kgs	20 psi 1.4 bar						
2,910 lbs 1,320 kgs	3,200 lbs 1,450 kgs	3,420 lbs 1,550 kgs	4,340 lbs 1,970 kgs	23 psi 1.6 bar						
			4,500 lbs 2,040 kgs	25 psi 1.7 bar	Gross Flat Plate	100% Tire Volume	Tread Depth			
			4,650 lbs 2,110 kgs	26 psi 1.8 bar	161 sq in 1,041 sq cm	47.3 gals 179 liters	50/32nd 40 mm			
			4,810 lbs 2,180 kgs	28 psi 1.9 bar						

## 13.6 R28 123A8/120B TL AGRIBIB®

MSPN : 87976 CAI : 123782

Load per tire						Pressure	Tire Technical Data				Rims (preferred in bold) <b>W12</b> W11							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions									
				1,300 lbs 590 kgs	6 psi 0.4 bar	<b>Overall Width</b>	<b>Overall Diameter</b>	<b>Loaded Radius</b>	<b>Rolling Circumference</b>	Tube MSPN 51627 Tube CAI 170053								
		2,050 lbs 930 kgs	2,620 lbs 1,190 kgs	1,630 lbs 740 kgs	7 psi 0.5 bar	14.6 in 372 mm	51.5 in 1,308 mm	23.3 in 592 mm	153.3 in 3,893 mm									
2,030 lbs 920 kgs	2,230 lbs 1,010 kgs	2,380 lbs 1,080 kgs	3,020 lbs 1,370 kgs	1,960 lbs 890 kgs	9 psi 0.6 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">39</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">20 x 2</td> </tr> </table>				Rolling Circumference Index		39		Number of Lugs		20 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
39																		
Number of Lugs																		
20 x 2																		
2,240 lbs 1,015 kgs	2,470 lbs 1,120 kgs	2,630 lbs 1,195 kgs	3,350 lbs 1,520 kgs	2,170 lbs 985 kgs	12 psi 0.8 bar													
2,450 lbs 1,110 kgs	2,700 lbs 1,225 kgs	2,890 lbs 1,310 kgs	3,670 lbs 1,665 kgs	2,380 lbs 1,080 kgs	15 psi 1.0 bar	<b>Gross Flat Plate</b>	<b>100% Tire Volume</b>	<b>Tread Depth</b>	18.3 in 465 mm									
2,670 lbs 1,210 kgs	2,940 lbs 1,335 kgs	3,150 lbs 1,430 kgs	4,000 lbs 1,815 kgs	2,590 lbs 1,175 kgs	17 psi 1.2 bar	182 sq in 1,172 sq cm	60.7 gals 230 liters	58/32nd 46 mm										
2,880 lbs 1,305 kgs	3,170 lbs 1,440 kgs	3,410 lbs 1,545 kgs	4,320 lbs 1,960 kgs	2,800 lbs 1,270 kgs	20 psi 1.4 bar													
3,090 lbs 1,400 kgs	3,420 lbs 1,550 kgs	3,660 lbs 1,660 kgs	4,650 lbs 2,110 kgs	3,010 lbs 1,365 kgs	23 psi 1.6 bar													
			4,970 lbs 2,255 kgs		26 psi 1.8 bar													
			5,140 lbs 2,330 kgs		28 psi 1.9 bar													

## 14.9 R28 128A8/125B TL AGRIBIB®

MSPN : 47219 CAI : 123850

Load per tire						Pressure	Tire Technical Data				Rims (preferred in bold) <b>W13</b> W12							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual			Unloaded Dimensions		Loaded Dimensions									
				1,550 lbs 705 kgs	6 psi 0.4 bar	<b>Overall Width</b>	<b>Overall Diameter</b>	<b>Loaded Radius</b>	<b>Rolling Circumference</b>	Tube MSPN 60374 Tube CAI 170148								
		2,380 lbs 1,080 kgs	3,040 lbs 1,380 kgs	1,920 lbs 870 kgs	7 psi 0.5 bar	15.9 in 403 mm	53.5 in 1,358 mm	24.1 in 612 mm	159.4 in 4,050 mm									
2,400 lbs 1,090 kgs	2,580 lbs 1,170 kgs	2,760 lbs 1,250 kgs	3,510 lbs 1,590 kgs	2,270 lbs 1,030 kgs	9 psi 0.6 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">40</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">20 x 2</td> </tr> </table>				Rolling Circumference Index		40		Number of Lugs		20 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
40																		
Number of Lugs																		
20 x 2																		
2,650 lbs 1,200 kgs	2,850 lbs 1,295 kgs	3,050 lbs 1,385 kgs	3,880 lbs 1,760 kgs	2,510 lbs 1,140 kgs	12 psi 0.8 bar													
2,900 lbs 1,315 kgs	3,130 lbs 1,420 kgs	3,350 lbs 1,520 kgs	4,250 lbs 1,930 kgs	2,760 lbs 1,250 kgs	15 psi 1.0 bar	<b>Gross Flat Plate</b>	<b>100% Tire Volume</b>	<b>Tread Depth</b>	19.8 in 504 mm									
3,140 lbs 1,425 kgs	3,420 lbs 1,550 kgs	3,660 lbs 1,660 kgs	4,630 lbs 2,100 kgs	3,010 lbs 1,365 kgs	17 psi 1.2 bar	206 sq in 1,332 sq cm	74.0 gals 280 liters	59/32nd 47 mm										
3,400 lbs 1,540 kgs	3,690 lbs 1,675 kgs	3,960 lbs 1,795 kgs	5,020 lbs 2,275 kgs	3,250 lbs 1,475 kgs	20 psi 1.4 bar													
3,640 lbs 1,650 kgs	3,970 lbs 1,800 kgs	4,250 lbs 1,930 kgs	5,390 lbs 2,445 kgs	3,490 lbs 1,585 kgs	23 psi 1.6 bar													
			5,770 lbs 2,615 kgs		26 psi 1.8 bar													
			5,950 lbs 2,700 kgs		28 psi 1.9 bar													

# MICHELIN Agribib® Technical Data

<b>16.9 R28 136A8/133B TL AGRIBIB®</b>																
<b>MSPN : 86531</b>						<b>CAI : 123856</b>										
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.										
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW15L</b> W14L, DW14L, W15L						
					Unloaded Dimensions		Loaded Dimensions		Tube MSPN 76858 Tube CAI 170149 Minimum Dual/Triple Spacing 22.3 in 566 mm							
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference								
					17.7 in 450 mm	56.2 in 1,427 mm	25.2 in 641 mm	166.9 in 4,240 mm								
				1,900 lbs 860 kgs	6 psi 0.4 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td>41</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td>20 x 2</td> </tr> </table>				Rolling Circumference Index		41	Number of Lugs		20 x 2	
Rolling Circumference Index																
41																
Number of Lugs																
20 x 2																
		2,950 lbs 1,340 kgs	3,770 lbs 1,710 kgs	2,360 lbs 1,070 kgs	7 psi 0.5 bar											
		3,440 lbs 1,560 kgs	4,370 lbs 1,980 kgs	2,830 lbs 1,285 kgs	9 psi 0.6 bar											
3,000 lbs 1,360 kgs	3,220 lbs 1,460 kgs	3,440 lbs 1,560 kgs	4,370 lbs 1,980 kgs	2,830 lbs 1,285 kgs	9 psi 0.6 bar											
3,310 lbs 1,500 kgs	3,560 lbs 1,615 kgs	3,810 lbs 1,730 kgs	4,830 lbs 2,190 kgs	3,130 lbs 1,420 kgs	12 psi 0.8 bar											
3,620 lbs 1,640 kgs	3,900 lbs 1,770 kgs	4,180 lbs 1,895 kgs	5,300 lbs 2,405 kgs	3,440 lbs 1,560 kgs	15 psi 1.0 bar											
3,920 lbs 1,780 kgs	4,250 lbs 1,930 kgs	4,550 lbs 2,065 kgs	5,770 lbs 2,615 kgs	3,740 lbs 1,695 kgs	17 psi 1.2 bar											
4,230 lbs 1,920 kgs	4,600 lbs 2,085 kgs	4,920 lbs 2,230 kgs	6,240 lbs 2,830 kgs	4,050 lbs 1,835 kgs	20 psi 1.4 bar											
4,540 lbs 2,060 kgs	4,940 lbs 2,240 kgs	5,290 lbs 2,400 kgs	6,700 lbs 3,040 kgs	4,340 lbs 1,970 kgs	23 psi 1.6 bar											
			7,180 lbs 3,255 kgs		26 psi 1.8 bar											
			7,410 lbs 3,360 kgs		28 psi 1.9 bar											
					Gross Flat Plate	100% Tire Volume	Tread Depth									
					262 sq in 1,690 sq cm	95.6 gals 362 liters	64/32nd 51 mm									

<b>380/85 R30 135A8/135B TL AGRIBIB®</b>																
<b>MSPN : 18784</b>						<b>CAI : 836509</b>										
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.										
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>W12</b> W13						
					Unloaded Dimensions		Loaded Dimensions		Tube MSPN 47204 Tube CAI 170054 Minimum Dual/Triple Spacing 20.4 in 519 mm							
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference								
					15.2 in 386 mm	55.7 in 1,416 mm	24.7 in 628 mm	165.1 in 4,194 mm								
		2,340 lbs 1,060 kgs	3,200 lbs 1,450 kgs	1,900 lbs 860 kgs	6 psi 0.4 bar	<table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td>41</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td>22 x 2</td> </tr> </table>				Rolling Circumference Index		41	Number of Lugs		22 x 2	
Rolling Circumference Index																
41																
Number of Lugs																
22 x 2																
		2,600 lbs 1,180 kgs	3,700 lbs 1,680 kgs	2,290 lbs 1,040 kgs	9 psi 0.6 bar											
		3,000 lbs 1,360 kgs	4,200 lbs 1,905 kgs	2,630 lbs 1,195 kgs	12 psi 0.8 bar											
		3,420 lbs 1,550 kgs	4,700 lbs 2,130 kgs	3,020 lbs 1,370 kgs	15 psi 1.0 bar											
		3,860 lbs 1,750 kgs	5,200 lbs 2,360 kgs	3,400 lbs 1,540 kgs	17 psi 1.2 bar											
		4,330 lbs 1,965 kgs	5,690 lbs 2,580 kgs	3,810 lbs 1,730 kgs	20 psi 1.4 bar											
		4,810 lbs 2,180 kgs	6,170 lbs 2,800 kgs	4,230 lbs 1,920 kgs	23 psi 1.6 bar											
			6,500 lbs 2,950 kgs		25 psi 1.7 bar											
			6,830 lbs 3,100 kgs		26 psi 1.8 bar											
			7,170 lbs 3,250 kgs		28 psi 1.9 bar											
					Gross Flat Plate	100% Tire Volume	Tread Depth									
					241 sq in 1,556 sq cm	80.3 gals 304 liters	58/32nd 46 mm									





# MICHELIN Agribib®

## Technical Data

<b>18.4 R30 142A8/139B TL AGRIBIB®</b>											
<b>MSPN : 42060</b>						<b>CAI : 123844</b>					
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW16L</b> W15L, DW15L, W16L	
					Unloaded Dimensions		Loaded Dimensions		Tube MSPN 77025 Tube CAI 170060 Minimum Dual/Triple Spacing 24.1 in 611 mm		
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference			
					19.8 in 504 mm	61.0 in 1,550 mm	27.3 in 695 mm	181.2 in 4,602 mm			
				2,290 lbs 1,040 kgs	6 psi 0.4 bar	Rolling Circumference Index				Tube MSPN 77025	
		3,510 lbs 1,590 kgs	4,480 lbs 2,030 kgs	2,820 lbs 1,280 kgs	7 psi 0.5 bar						Number of Lugs 19 x 2
3,530 lbs 1,600 kgs	3,790 lbs 1,720 kgs	4,060 lbs 1,840 kgs	5,180 lbs 2,350 kgs	3,340 lbs 1,515 kgs	9 psi 0.6 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	24.1 in 611 mm		
3,890 lbs 1,765 kgs	4,200 lbs 1,905 kgs	4,500 lbs 2,040 kgs	5,730 lbs 2,600 kgs	3,700 lbs 1,680 kgs	12 psi 0.8 bar					310 sq in 2,003 sq cm	124.1 gals 470 liters
4,250 lbs 1,930 kgs	4,610 lbs 2,090 kgs	4,940 lbs 2,240 kgs	6,280 lbs 2,850 kgs	4,060 lbs 1,840 kgs	15 psi 1.0 bar						
4,630 lbs 2,100 kgs	5,030 lbs 2,280 kgs	5,380 lbs 2,440 kgs	6,830 lbs 3,100 kgs	4,420 lbs 2,005 kgs	17 psi 1.2 bar						
4,990 lbs 2,265 kgs	5,430 lbs 2,465 kgs	5,820 lbs 2,640 kgs	7,400 lbs 3,355 kgs	4,770 lbs 2,165 kgs	20 psi 1.4 bar						
5,360 lbs 2,430 kgs	5,840 lbs 2,650 kgs	6,260 lbs 2,840 kgs	7,950 lbs 3,605 kgs	5,140 lbs 2,330 kgs	23 psi 1.6 bar						
			8,500 lbs 3,855 kgs		26 psi 1.8 bar						
			8,770 lbs 3,980 kgs		28 psi 1.9 bar						

<b>320/85 R34 133A8/130B TL AGRIBIB®</b>											
<b>MSPN : 73532</b>						<b>CAI : 122760</b>					
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>W10</b>	
					Unloaded Dimensions		Loaded Dimensions		Tube MSPN 355759 Tube CAI 25933 Minimum Dual/Triple Spacing 17.1 in 434 mm		
					Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference			
					13.2 in 335 mm	55.9 in 1,420 mm	25.6 in 651 mm	166.9 in 4,239 mm			
		1,870 lbs 850 kgs	2,680 lbs 1,215 kgs	1,550 lbs 705 kgs	6 psi 0.4 bar	Rolling Circumference Index 41				Tube MSPN 355759	
		1,980 lbs 900 kgs	3,110 lbs 1,410 kgs	1,900 lbs 860 kgs	9 psi 0.6 bar						Number of Lugs 24 x 2
2,270 lbs 1,030 kgs	2,470 lbs 1,120 kgs	2,680 lbs 1,215 kgs	3,550 lbs 1,610 kgs	2,170 lbs 985 kgs	12 psi 0.8 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	17.1 in 434 mm		
2,910 lbs 1,320 kgs	3,200 lbs 1,450 kgs	3,420 lbs 1,550 kgs	4,410 lbs 2,000 kgs	2,810 lbs 1,275 kgs	17 psi 1.2 bar					175 sq in 1,129 sq cm	58.9 gals 223 liters
3,530 lbs 1,600 kgs	3,860 lbs 1,750 kgs	4,190 lbs 1,900 kgs	5,360 lbs 2,430 kgs	3,400 lbs 1,540 kgs	23 psi 1.6 bar						
3,970 lbs 1,800 kgs	4,300 lbs 1,950 kgs	4,540 lbs 2,060 kgs	6,170 lbs 2,800 kgs	3,780 lbs 1,715 kgs	29 psi 2.0 bar						
4,080 lbs 1,850 kgs	4,420 lbs 2,005 kgs	4,670 lbs 2,120 kgs	6,330 lbs 2,870 kgs	3,890 lbs 1,765 kgs	32 psi 2.2 bar						
4,190 lbs 1,900 kgs	4,540 lbs 2,060 kgs	4,810 lbs 2,180 kgs	6,480 lbs 2,940 kgs	4,000 lbs 1,815 kgs	35 psi 2.4 bar						
			6,620 lbs 3,005 kgs		38 psi 2.6 bar						
			6,780 lbs 3,075 kgs		41 psi 2.8 bar						

**380/85 R34 137A8/137B TL AGRIBIB®**  
**MSPN : 59412** **CAI : 122781**

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>W12</b> W13	
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure							
		2,470 lbs 1,120 kgs	3,420 lbs 1,550 kgs	2,000 lbs 905 kgs	6 psi 0.4 bar	Unloaded Dimensions	Loaded Dimensions	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN 37243 Tube CAI 171115 Minimum Dual/Triple Spacing 20.0 in 507 mm
2,760 lbs 1,250 kgs	2,760 lbs 1,250 kgs	2,910 lbs 1,320 kgs	3,950 lbs 1,790 kgs	2,430 lbs 1,100 kgs	9 psi 0.6 bar							
3,200 lbs 1,450 kgs	3,200 lbs 1,450 kgs	3,420 lbs 1,550 kgs	4,460 lbs 2,025 kgs	2,810 lbs 1,275 kgs	12 psi 0.8 bar	Rolling Circumference Index 42 Number of Lugs 23 x 2						
1,450 lbs 650 kgs	1,450 lbs 650 kgs	1,550 lbs 700 kgs	2,025 lbs 920 kgs	1,275 lbs 580 kgs	0.8 bar							
3,640 lbs 1,650 kgs	3,640 lbs 1,650 kgs	3,910 lbs 1,775 kgs	4,980 lbs 2,260 kgs	3,200 lbs 1,450 kgs	15 psi 1.0 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	Minimum Dual/Triple Spacing			
4,080 lbs 1,850 kgs	4,080 lbs 1,850 kgs	4,410 lbs 2,000 kgs	5,510 lbs 2,500 kgs	3,590 lbs 1,630 kgs	17 psi 1.2 bar					254 sq in 1,638 sq cm	81.1 gals 307 liters	
4,570 lbs 2,075 kgs	4,570 lbs 2,075 kgs	4,880 lbs 2,215 kgs	6,060 lbs 2,750 kgs	4,030 lbs 1,830 kgs	20 psi 1.4 bar	Rolling Circumference Index 43 Number of Lugs 20 x 2						
5,070 lbs 2,300 kgs	5,070 lbs 2,300 kgs	5,360 lbs 2,430 kgs	6,610 lbs 3,000 kgs	4,460 lbs 2,025 kgs	23 psi 1.6 bar							
			6,940 lbs 3,150 kgs		25 psi 1.7 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	Minimum Dual/Triple Spacing			
			7,280 lbs 3,300 kgs		26 psi 1.8 bar					275 sq in 1,774 sq cm	117.5 gals 445 liters	
			7,610 lbs 3,450 kgs		28 psi 1.9 bar							

**420/85 R34 142A8/142B TL AGRIBIB®**  
**MSPN : 84230** **CAI : 042716**

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>DW15L</b> W14L, DW14L, W15L	
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure							
		2,870 lbs 1,300 kgs	3,970 lbs 1,800 kgs	2,360 lbs 1,070 kgs	6 psi 0.4 bar	Unloaded Dimensions	Loaded Dimensions	Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference	Tube MSPN 37243 Tube CAI 171115 Minimum Dual/Triple Spacing 22.7 in 576 mm
3,200 lbs 1,450 kgs	3,200 lbs 1,450 kgs	3,430 lbs 1,555 kgs	4,570 lbs 2,075 kgs	2,820 lbs 1,280 kgs	9 psi 0.6 bar							
3,730 lbs 1,690 kgs	3,730 lbs 1,690 kgs	3,990 lbs 1,810 kgs	5,180 lbs 2,350 kgs	3,280 lbs 1,490 kgs	12 psi 0.8 bar	Rolling Circumference Index 43 Number of Lugs 20 x 2						
4,250 lbs 1,930 kgs	4,250 lbs 1,930 kgs	4,560 lbs 2,070 kgs	5,790 lbs 2,625 kgs	3,750 lbs 1,700 kgs	15 psi 1.0 bar							
4,780 lbs 2,170 kgs	4,780 lbs 2,170 kgs	5,130 lbs 2,325 kgs	6,390 lbs 2,900 kgs	4,210 lbs 1,910 kgs	17 psi 1.2 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	Minimum Dual/Triple Spacing			
5,310 lbs 2,410 kgs	5,310 lbs 2,410 kgs	5,690 lbs 2,580 kgs	7,000 lbs 3,175 kgs	4,670 lbs 2,120 kgs	20 psi 1.4 bar					275 sq in 1,774 sq cm	117.5 gals 445 liters	
5,840 lbs 2,650 kgs	5,840 lbs 2,650 kgs	6,250 lbs 2,835 kgs	7,610 lbs 3,450 kgs	5,140 lbs 2,330 kgs	23 psi 1.6 bar	Rolling Circumference Index 43 Number of Lugs 20 x 2						
			7,990 lbs 3,625 kgs		25 psi 1.7 bar							
			8,380 lbs 3,800 kgs		26 psi 1.8 bar	Gross Flat Plate	100% Tire Volume	Tread Depth	Minimum Dual/Triple Spacing			
			8,760 lbs 3,975 kgs		28 psi 1.9 bar					275 sq in 1,774 sq cm	117.5 gals 445 liters	



# MICHELIN Agribib® Technical Data

<b>18.4 R34 144A8/141B TL AGRIBIB®</b>						
<b>MSPN : 40989</b>			<b>CAI : 123846</b>			
Load per tire						
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	
				2,490 lbs 1,130 kgs	6 psi 0.4 bar	
		3,700 lbs 1,680 kgs	4,720 lbs 2,140 kgs	3,010 lbs 1,365 kgs	7 psi 0.5 bar	
3,750 lbs 1,700 kgs	4,010 lbs 1,820 kgs	4,300 lbs 1,950 kgs	5,470 lbs 2,480 kgs	3,530 lbs 1,600 kgs	9 psi 0.6 bar	
4,130 lbs 1,875 kgs	4,440 lbs 2,015 kgs	4,760 lbs 2,160 kgs	6,050 lbs 2,745 kgs	3,910 lbs 1,775 kgs	12 psi 0.8 bar	
4,520 lbs 2,050 kgs	4,870 lbs 2,210 kgs	5,220 lbs 2,370 kgs	6,640 lbs 3,010 kgs	4,290 lbs 1,945 kgs	15 psi 1.0 bar	
4,920 lbs 2,230 kgs	5,310 lbs 2,410 kgs	5,690 lbs 2,580 kgs	7,220 lbs 3,275 kgs	4,670 lbs 2,120 kgs	17 psi 1.2 bar	
5,300 lbs 2,405 kgs	5,740 lbs 2,605 kgs	6,150 lbs 2,790 kgs	7,800 lbs 3,540 kgs	5,050 lbs 2,290 kgs	20 psi 1.4 bar	
5,690 lbs 2,580 kgs	6,170 lbs 2,800 kgs	6,610 lbs 3,000 kgs	8,390 lbs 3,805 kgs	5,430 lbs 2,465 kgs	23 psi 1.6 bar	
			8,970 lbs 4,070 kgs		26 psi 1.8 bar	
			9,260 lbs		28 psi	
			4,200 kgs		1.9 bar	
See notes on page 14 for guidance on correct application of these load / pressure tables.						
				Tire Technical Data		Rims (preferred in bold) <b>DW16L</b> W15L, DW15L, W16L
Unloaded Dimensions		Loaded Dimensions				
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference			
18.8 in 477 mm	65.4 in 1,662 mm	29.3 in 744 mm	194.2 in 4,933 mm			
Rolling Circumference Index 44				Number of Lugs 20 x 2		Tube MSPN 71039
Gross Flat Plate		100% Tire Volume	Tread Depth		Tube CAI 170150	Minimum Dual/Triple Spacing
315 sq in 2,033 sq cm		139.2 gals 527 liters	68/32nd 54 mm		24.1 in 611 mm	

<b>12.4 R38 125A8/122B TL AGRIBIB®</b>						
<b>MSPN : 50333</b>			<b>CAI : 123962</b>			
Load per tire						
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	Pressure		
		2,180 lbs 990 kgs	2,780 lbs 1,260 kgs	7 psi 0.5 bar		
2,180 lbs 990 kgs	2,360 lbs 1,070 kgs	2,540 lbs 1,150 kgs	3,220 lbs 1,460 kgs	9 psi 0.6 bar		
2,400 lbs 1,090 kgs	2,610 lbs 1,185 kgs	2,810 lbs 1,275 kgs	3,560 lbs 1,615 kgs	12 psi 0.8 bar		
2,630 lbs 1,195 kgs	2,870 lbs 1,300 kgs	3,090 lbs 1,400 kgs	3,910 lbs 1,775 kgs	15 psi 1.0 bar		
2,850 lbs 1,295 kgs	3,130 lbs 1,420 kgs	3,350 lbs 1,520 kgs	4,250 lbs 1,930 kgs	17 psi 1.2 bar		
3,090 lbs 1,400 kgs	3,380 lbs 1,535 kgs	3,630 lbs 1,645 kgs	4,610 lbs 2,090 kgs	20 psi 1.4 bar		
3,310 lbs 1,500 kgs	3,640 lbs 1,650 kgs	3,900 lbs 1,770 kgs	4,950 lbs 2,245 kgs	23 psi 1.6 bar		
			5,130 lbs 2,325 kgs	25 psi 1.7 bar		
			5,290 lbs 2,400 kgs	26 psi 1.8 bar		
			5,470 lbs 2,480 kgs	28 psi 1.9 bar		
See notes on page 14 for guidance on correct application of these load / pressure tables.						
				Tire Technical Data		Rims (preferred in bold) <b>W11</b> W10 DW10
Unloaded Dimensions		Loaded Dimensions				
Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference			
12.2 in 311 mm	59.1 in 1,500 mm	27.2 in 691 mm	176.4 in 4,481 mm			
Rolling Circumference Index 42				Number of Lugs 24 x 2		Tube MSPN 55286
Gross Flat Plate		100% Tire Volume	Tread Depth		Tube CAI 170072	Minimum Dual/Triple Spacing
182 sq in 1,171 sq cm		58.1 gals 220 liters	44/32nd 35 mm		16.9 in 429 mm	







**520/85 R38 155A8/155B TL AGRIBIB®**  
**MSPN : 43308** **CAI : 303668**

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>DW16L</b> W16A, DD16, W18A, DD18							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure		Unloaded Dimensions		Loaded Dimensions									
		4,190 lbs 1,900 kgs	5,840 lbs 2,650 kgs	3,400 lbs 1,540 kgs	6 psi 0.4 bar	<b>Overall Width</b>	<b>Overall Diameter</b>	<b>Loaded Radius</b>	<b>Rolling Circumference</b>	20.9 in 530 mm	73.0 in 1,855 mm	32.3 in 821 mm	217.7 in 5,529 mm					
4,670 lbs 2,120 kgs	4,670 lbs 2,120 kgs	5,070 lbs 2,300 kgs	6,720 lbs 3,050 kgs	4,110 lbs 1,865 kgs	9 psi 0.6 bar													
5,510 lbs 2,500 kgs	5,510 lbs 2,500 kgs	5,840 lbs 2,650 kgs	7,610 lbs 3,450 kgs	4,850 lbs 2,200 kgs	12 psi 0.8 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">23 x 2</td> </tr> </table>				Rolling Circumference Index		46		Number of Lugs		23 x 2		Tube MSPN 80303
Rolling Circumference Index																		
46																		
Number of Lugs																		
23 x 2																		
6,170 lbs 2,800 kgs	6,230 lbs 2,825 kgs	6,720 lbs 3,050 kgs	8,490 lbs 3,850 kgs	5,480 lbs 2,485 kgs	15 psi 1.0 bar													
6,970 lbs 3,160 kgs	6,940 lbs 3,150 kgs	7,610 lbs 3,450 kgs	9,370 lbs 4,250 kgs	6,110 lbs 2,770 kgs	17 psi 1.2 bar	<b>Gross Flat Plate</b>	<b>100% Tire Volume</b>	<b>Tread Depth</b>	64/32nd 26.4 in 670 mm	26.4 in 670 mm								
7,750 lbs 3,515 kgs	7,740 lbs 3,510 kgs	8,360 lbs 3,790 kgs	10,200 lbs 4,625 kgs	6,810 lbs 3,090 kgs	20 psi 1.4 bar													
8,540 lbs 3,875 kgs	8,540 lbs 3,875 kgs	9,090 lbs 4,125 kgs	11,020 lbs 5,000 kgs	7,520 lbs 3,410 kgs	23 psi 1.6 bar	403 sq in 2,600 sq cm	179.1 gals 678 liters	51 mm	26.4 in 670 mm									
			11,610 lbs 5,265 kgs		25 psi 1.7 bar													
			12,200 lbs 5,535 kgs		26 psi 1.8 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">23 x 2</td> </tr> </table>				Rolling Circumference Index		46		Number of Lugs		23 x 2		Tube CAI 170152
Rolling Circumference Index																		
46																		
Number of Lugs																		
23 x 2																		
			12,790 lbs 5,800 kgs		28 psi 1.9 bar													

**480/80 R42 156A8/156B TL AGRIBIB®**  
**MSPN : 03395** **CAI : 404096**

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>DW16A</b> W16A, DD16							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure		Unloaded Dimensions		Loaded Dimensions									
		3,660 lbs 1,660 kgs	5,130 lbs 2,325 kgs	2,910 lbs 1,320 kgs	6 psi 0.4 bar	<b>Overall Width</b>	<b>Overall Diameter</b>	<b>Loaded Radius</b>	<b>Rolling Circumference</b>	19.4 in 494 mm	73.1 in 1,858 mm	33.4 in 847 mm	218.0 in 5,538 mm					
4,080 lbs 1,850 kgs	4,080 lbs 1,850 kgs	4,410 lbs 2,000 kgs	5,930 lbs 2,690 kgs	3,540 lbs 1,605 kgs	9 psi 0.6 bar													
4,780 lbs 2,170 kgs	4,780 lbs 2,170 kgs	5,150 lbs 2,335 kgs	6,720 lbs 3,050 kgs	4,170 lbs 1,890 kgs	12 psi 0.8 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">24 x 2</td> </tr> </table>				Rolling Circumference Index		46		Number of Lugs		24 x 2		Tube MSPN 51463
Rolling Circumference Index																		
46																		
Number of Lugs																		
24 x 2																		
6,190 lbs 2,810 kgs	6,190 lbs 2,810 kgs	6,650 lbs 3,015 kgs	8,320 lbs 3,775 kgs	5,430 lbs 2,465 kgs	17 psi 1.2 bar													
7,610 lbs 3,450 kgs	7,610 lbs 3,450 kgs	8,140 lbs 3,690 kgs	9,920 lbs 4,500 kgs	6,690 lbs 3,035 kgs	23 psi 1.6 bar	<b>Gross Flat Plate</b>	<b>100% Tire Volume</b>	<b>Tread Depth</b>	25.1 in 638 mm									
8,210 lbs 3,725 kgs	8,210 lbs 3,725 kgs	8,790 lbs 3,985 kgs	11,020 lbs 5,000 kgs	7,230 lbs 3,280 kgs	29 psi 2.0 bar													
8,510 lbs 3,860 kgs	8,510 lbs 3,860 kgs	9,110 lbs 4,130 kgs	11,570 lbs 5,250 kgs	7,500 lbs 3,400 kgs	32 psi 2.2 bar	318 sq in 2,051 sq cm	147.9 gals 560 liters	55 mm	25.1 in 638 mm									
8,820 lbs 4,000 kgs	8,820 lbs 4,000 kgs	9,440 lbs 4,280 kgs	12,130 lbs 6,000 kgs	7,760 lbs 3,520 kgs	35 psi 2.4 bar													
			12,680 lbs 5,750 kgs		38 psi 2.6 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">24 x 2</td> </tr> </table>				Rolling Circumference Index		46		Number of Lugs		24 x 2		Tube CAI 170084
Rolling Circumference Index																		
46																		
Number of Lugs																		
24 x 2																		
			13,230 lbs 6,000 kgs		41 psi 2.8 bar													



# MICHELIN Agribib® Technical Data

<b>520/85 R42 157A8/157B TL AGRIBIB®</b>											
<b>MSPN : 63687</b>						<b>CAI : 122791</b>					
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW18A</b> W18A, DD18	
						Unloaded Dimensions		Loaded Dimensions			Tube MSPN 69853 Tube CAI 170076 Minimum Dual/Triple Spacing 27.3 in 694 mm
						Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		
		4,410 lbs 2,000 kgs	6,170 lbs 2,800 kgs	3,590 lbs 1,630 kgs	6 psi 0.4 bar	21.2 in 539 mm	76.6 in 1,945 mm	34.2 in 869 mm	227.2 in 5,771 mm		
4,940 lbs 2,240 kgs	4,940 lbs 2,240 kgs	5,200 lbs 2,360 kgs	7,110 lbs 3,225 kgs	4,340 lbs 1,970 kgs	9 psi 0.6 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Rolling Circumference Index</b> 47 <b>Number of Lugs</b> 22 x 2                 </div>					
5,680 lbs 2,575 kgs	5,680 lbs 2,575 kgs	6,170 lbs 2,800 kgs	8,050 lbs 3,650 kgs	4,990 lbs 2,265 kgs	12 psi 0.8 bar						
6,610 lbs 3,000 kgs	6,530 lbs 2,960 kgs	7,000 lbs 3,175 kgs	8,980 lbs 4,075 kgs	5,750 lbs 2,610 kgs	15 psi 1.0 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Gross Flat Plate</b> </div>					
7,390 lbs 3,350 kgs	7,390 lbs 3,350 kgs	7,830 lbs 3,550 kgs	9,920 lbs 4,500 kgs	6,500 lbs 2,950 kgs	17 psi 1.2 bar					<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>100% Tire Volume</b> </div>	
8,250 lbs 3,740 kgs	8,250 lbs 3,740 kgs	8,730 lbs 3,960 kgs	10,800 lbs 4,900 kgs	7,250 lbs 3,290 kgs	20 psi 1.4 bar	426 sq in 2,750 sq cm		195.4 gals 740 liters		59 mm	
9,090 lbs 4,125 kgs	9,090 lbs 4,125 kgs	9,650 lbs 4,375 kgs	11,680 lbs 5,300 kgs	8,000 lbs 3,630 kgs	23 psi 1.6 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
			12,310 lbs 5,585 kgs		25 psi 1.7 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
			12,930 lbs 5,865 kgs		26 psi 1.8 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
			13,560 lbs 6,150 kgs		28 psi 1.9 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	

<b>420/80 R46 151A8/148B TL AGRIBIB®</b>											
<b>MSPN : 58733</b>						<b>CAI : 122770</b>					
Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.					
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW13</b>	
						Unloaded Dimensions		Loaded Dimensions			Tube MSPN 31525 Tube CAI 203376 Minimum Dual/Triple Spacing 21.7 in 552 mm
						Overall Width	Overall Diameter	Loaded Radius	Rolling Circumference		
		3,200 lbs 1,450 kgs	4,410 lbs 2,000 kgs	2,560 lbs 1,160 kgs	6 psi 0.4 bar	16.1 in 410 mm	73.7 in 1,872 mm	33.9 in 861 mm	218.7 in 5,555 mm		
3,200 lbs 1,450 kgs	3,530 lbs 1,600 kgs	3,750 lbs 1,700 kgs	5,160 lbs 2,340 kgs	3,110 lbs 1,410 kgs	9 psi 0.6 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Rolling Circumference Index</b> 46 <b>Number of Lugs</b> 26 x 2                 </div>					
3,750 lbs 1,700 kgs	4,080 lbs 1,850 kgs	4,410 lbs 2,000 kgs	5,900 lbs 2,675 kgs	3,590 lbs 1,630 kgs	12 psi 0.8 bar						
4,940 lbs 2,240 kgs	5,360 lbs 2,430 kgs	5,680 lbs 2,575 kgs	7,390 lbs 3,350 kgs	4,720 lbs 2,140 kgs	17 psi 1.2 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Gross Flat Plate</b> </div>		<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>100% Tire Volume</b> </div>		<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Tread Depth</b> </div>	
5,840 lbs 2,650 kgs	6,390 lbs 2,900 kgs	6,940 lbs 3,150 kgs	8,820 lbs 4,000 kgs	5,620 lbs 2,550 kgs	23 psi 1.6 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
6,610 lbs 3,000 kgs	7,170 lbs 3,250 kgs	7,610 lbs 3,450 kgs	10,200 lbs 4,625 kgs	6,310 lbs 2,860 kgs	29 psi 2.0 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
6,780 lbs 3,075 kgs	7,390 lbs 3,350 kgs	7,830 lbs 3,550 kgs	10,600 lbs 4,810 kgs	6,500 lbs 2,950 kgs	32 psi 2.2 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
6,940 lbs 3,150 kgs	7,610 lbs 3,450 kgs	8,050 lbs 3,650 kgs	11,020 lbs 5,000 kgs	6,690 lbs 3,035 kgs	35 psi 2.4 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
			11,190 lbs 5,075 kgs		38 psi 2.6 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	
			11,350 lbs 5,150 kgs		41 psi 2.8 bar	274 sq in 1,769 sq cm		106.4 gals 403 liters		51 mm	

## 480/80 R46 158A8/158B TL AGRIBIB®

MSPN : 94069 CAI : 637231

Load per tire						See notes on page 14 for guidance on correct application of these load / pressure tables.	Tire Technical Data				Rims (preferred in bold) <b>DW16A</b> W16A, DD16, DW16L							
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual	Pressure		Unloaded Dimensions		Loaded Dimensions									
		3,900 lbs 1,770 kgs	5,460 lbs 2,475 kgs	3,200 lbs 1,450 kgs	6 psi 0.4 bar	<b>Overall Width</b>	<b>Overall Diameter</b>	<b>Loaded Radius</b>	<b>Rolling Circumference</b>	499 mm	1,948 mm	889 mm	5,874 mm					
4,300 lbs 1,950 kgs	4,300 lbs 1,950 kgs	4,650 lbs 2,110 kgs	6,340 lbs 2,875 kgs	3,780 lbs 1,715 kgs	9 psi 0.6 bar													
5,000 lbs 2,270 kgs	5,000 lbs 2,270 kgs	5,390 lbs 2,445 kgs	7,220 lbs 3,275 kgs	4,280 lbs 1,940 kgs	12 psi 0.8 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">47</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">25 x 2</td> </tr> </table>				Rolling Circumference Index		47		Number of Lugs		25 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
47																		
Number of Lugs																		
25 x 2																		
6,420 lbs 2,910 kgs	6,420 lbs 2,910 kgs	6,890 lbs 3,125 kgs	8,980 lbs 4,075 kgs	5,270 lbs 2,390 kgs	17 psi 1.2 bar													
7,830 lbs 3,550 kgs	7,830 lbs 3,550 kgs	8,380 lbs 3,800 kgs	10,750 lbs 4,875 kgs	6,260 lbs 2,840 kgs	23 psi 1.6 bar	<b>Gross Flat Plate</b>	<b>100% Tire Volume</b>	<b>Tread Depth</b>	349 sq in 2,251 sq cm	155.8 gals 590 liters	68/32nd 54 mm	25.1 in 638 mm						
8,600 lbs 3,900 kgs	8,600 lbs 3,900 kgs	9,200 lbs 4,175 kgs	11,850 lbs 5,375 kgs	7,250 lbs 3,290 kgs	29 psi 2.0 bar													
8,980 lbs 4,075 kgs	8,980 lbs 4,075 kgs	9,610 lbs 4,360 kgs	12,410 lbs 5,630 kgs	7,750 lbs 3,515 kgs	32 psi 2.2 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
9,370 lbs 4,250 kgs	9,370 lbs 4,250 kgs	10,030 lbs 4,550 kgs	12,960 lbs 5,880 kgs	8,250 lbs 3,740 kgs	35 psi 2.4 bar													
			13,510 lbs 6,130 kgs		38 psi 2.6 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">47</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">25 x 2</td> </tr> </table>				Rolling Circumference Index		47		Number of Lugs		25 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
47																		
Number of Lugs																		
25 x 2																		
			14,070 lbs 6,380 kgs		41 psi 2.8 bar													
					25 psi 1.7 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
			12,700 lbs 5,760 kgs		25 psi 1.7 bar													
			13,380 lbs 6,070 kgs		26 psi 1.8 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
			14,070 lbs 6,380 kgs		28 psi 1.9 bar													
					25 psi 1.7 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					25 psi 1.7 bar													
					26 psi 1.8 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					26 psi 1.8 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of Lugs</td> </tr> <tr> <td colspan="2">22 x 2</td> </tr> </table>				Rolling Circumference Index		48		Number of Lugs		22 x 2		Minimum Dual/Triple Spacing
Rolling Circumference Index																		
48																		
Number of Lugs																		
22 x 2																		
					28 psi 1.9 bar													
					28 psi 1.9 bar	<table border="1"> <tr> <td colspan="2">Rolling Circumference Index</td> </tr> <tr> <td colspan="2">48</td> </tr> <tr> <td colspan="2">Number of</td></tr></table>				Rolling Circumference Index		48		Number of				
Rolling Circumference Index																		
48																		
Number of																		



# MICHELIN Agribib® Technical Data



## 480/80 R50 159A8/159B TL AGRIBIB® MSPN : 94576 CAI : 471947

Load per tire						Pressure	Tire Technical Data				Rims (preferred in bold) <b>DW15A</b> DW16A
30 mph 50 km/h	25 mph 40 km/h	20 mph 30 km/h	6 mph 10 km/h	25 mph Dual 40 km/h Dual							
		3,970 lbs 1,800 kgs	5,680 lbs 2,575 kgs	3,300 lbs 1,495 kgs	6 psi 0.4 bar	Unloaded Dimensions	Loaded Dimensions		Rolling Circumference	Tube MSPN 31525	
4,540 lbs 2,060 kgs	4,540 lbs 2,060 kgs	4,810 lbs 2,180 kgs	6,600 lbs 2,995 kgs	4,000 lbs 1,815 kgs	9 psi 0.6 bar						Overall Width
5,200 lbs 2,360 kgs	5,200 lbs 2,360 kgs	5,680 lbs 2,575 kgs	7,520 lbs 3,410 kgs	4,570 lbs 2,075 kgs	12 psi 0.8 bar	18.7 in 474 mm	80.9 in 2,056 mm	37.1 in 942 mm	243.5 in 6,184 mm	Minimum Dual/Triple Spacing 24.6 in 626 mm	
6,780 lbs 3,075 kgs	6,780 lbs 3,075 kgs	7,170 lbs 3,250 kgs	9,370 lbs 4,250 kgs	5,960 lbs 2,705 kgs	17 psi 1.2 bar	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Rolling Circumference Index</b> 48 <b>Number of Lugs</b> 26 x 2                 </div>					
8,270 lbs 3,750 kgs	8,270 lbs 3,750 kgs	8,820 lbs 4,000 kgs	11,350 lbs 5,150 kgs	7,280 lbs 3,300 kgs	23 psi 1.6 bar						
9,090 lbs 4,125 kgs	9,090 lbs 4,125 kgs	9,650 lbs 4,375 kgs	13,230 lbs 6,000 kgs	8,000 lbs 3,630 kgs	29 psi 2.0 bar	Gross Flat Plate	100% Tire Volume	Tread Depth			
9,370 lbs 4,250 kgs	9,370 lbs 4,250 kgs	9,920 lbs 4,500 kgs	13,560 lbs 6,150 kgs	8,250 lbs 3,740 kgs	32 psi 2.2 bar						
9,650 lbs 4,375 kgs	9,650 lbs 4,375 kgs	10,200 lbs 4,625 kgs	13,890 lbs 6,300 kgs	8,490 lbs 3,850 kgs	35 psi 2.4 bar	360 sq in 2,322 sq cm	168.8 gals 639 liters	71/32nd 56 mm			
			14,110 lbs 6,400 kgs		38 psi 2.6 bar						
			14,330 lbs 6,500 kgs		41 psi 2.8 bar						

See notes on page 14 for guidance on correct application of these load / pressure tables.